

## PC1011P Pre Amplifier



### Features

- Multiple inputs and outputs, twelve inputs (three unbalanced MIC inputs, two balanced MIC inputs, three unbalanced Aux inputs, two balanced Aux inputs, two priority inputs), four outputs
- Muting function
- Individual volume control
- Bass and Treble tone control
- A five-element LED level meter is provided for quick and easy visual monitoring of output level

### Description


The PC1011P is a public address pre-amplifier with three unbalanced MIC inputs, two balanced MIC inputs, three unbalanced Aux inputs, two balanced Aux inputs, two priority inputs, and four outputs.

Priority muting is achieved via EMC for overriding music for paging and emergency alarms. Individual gain controls are provided for MIC and AUX inputs, bass and treble controls are provided for overall tone control.

## Specification


Model	PC1011P
<b>Inputs</b>	Mic1, 2, 3 : 600Ω, 2.5mV, unbalance Mic4,5 : 600Ω, 2.5mV, balance EMC1, 2, Aux 1, 2, 3 : 10kΩ, 250mV, unbalance Aux 4,5 : 10kΩ, 250mV, balance
<b>Audio output</b>	0dBV
<b>Frequency response</b>	20Hz-25kHz(±3dB), Line in
<b>Signal/ noise ratio</b>	Mic input : >80Db, Aux input : >85dB
<b>Tone</b>	Bass : ±10dB(100Hz), Treble : ±10dB(10kHz)
<b>Chime</b>	Press the button once, the tune is “(1—3—5—i—)”, Volume adjustable.
<b>Protection</b>	AC fuse ×1(220V: F0.6AL, 110V: F1AL)
<b>Power Requirement</b>	AC 110-115V/220-230V/ 50-60Hz; DC24V
<b>Outer Packing Size(mm)</b>	(LxWxH) 555×455×185
<b>Unit Size(mm)</b>	(LxWxH) 484×349.5×88
<b>Gross weight</b>	8.5kg
<b>Net weight</b>	6.7kg

## FRONT PANEL

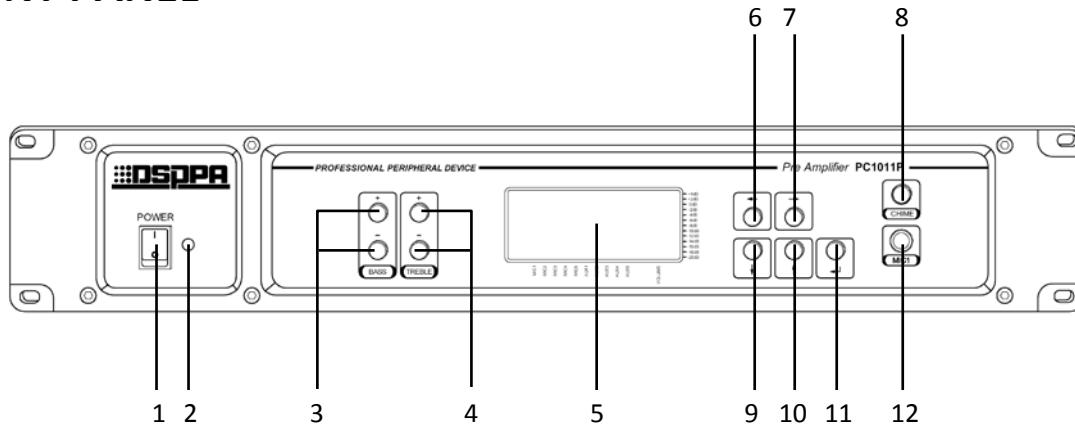

- |                   |                       |                               |
|-------------------|-----------------------|-------------------------------|
| 1 Power switch    | 5 Display Screen      | 9 Gain attenuation adjustment |
| 2 Power indicator | 6 Left select button  | 10 Gain advance adjustment    |
| 3 Bass control.   | 7 Right select button | 11 Enter                      |
| 4 Treble control  | 8 Chime button        | 12 MIC1 Inputs                |

## REAR PANEL

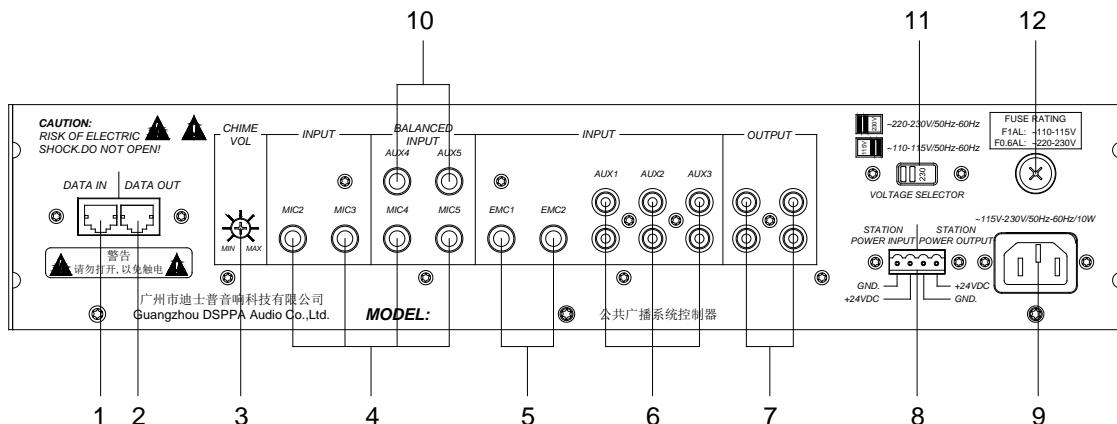

- |                         |                      |                           |
|-------------------------|----------------------|---------------------------|
| 1 Remote Control Input  | 5 EMC1,2 Input       | 9 AC Power Input          |
| 2 Remote Control Output | 6 AUX1,2,3 Input     | 10 AUX4,5 Input           |
| 3 Chime Volume Control  | 7 Audio Output       | 11 AC110V/AC220V Selector |
| 4 MIC2,3,4,5 Input      | 8 DC 24V Power Input | 12 AC Power Fuse          |