

## D6802/D6803 2.4G Digital Wireless Conference System Microphones



### Features

- 1) Using latest numerical control technology design.
- Condenser pick-up, provides the top definition and directivity
- LCD screen indicate working mode
- Use 1.5V AA \*3 battery, convenient to change battery
- Speech number at the same time mostly 4 people, include chairman unit and delegate unit totally
- standby function

### Description


D6802 & D6803 are 2.4G digital wireless conference system microphones. D6802 is a chairman unit and D6803 is a delegate unit. It has high fidelity microphone head, condenser pickup head, provides the top definition and directivity, light ring display working condition. It has LCD screen display working condition and equip with prior-button to control delegate unit speak, press the button can be mandatory to cut off the delegate to speech. Use 1.5V AA battery, pay attention to distinguish the positive and negative when replace the battery.

### Specification

Model	D6802
Power supply	DC4.5V, 1.5V AA*3
Transmitter power	10mW
Microphone core	Condenser, single direction
Sensitivity	-43 ± 2dB @ 1KHz
Frequency response	20Hz~18KHz
Power consumption	130mA
Model	D6803
Power supply	DC4.5V, 1.5V AA*3
Transmitter power	10mW
Microphone core	Condenser, single direction
Sensitivity	-43 ± 2dB @ 1KHz
Frequency response	20Hz~18KHz
Power consumption	130mA


## *Appearance*

### **Chairman unit**

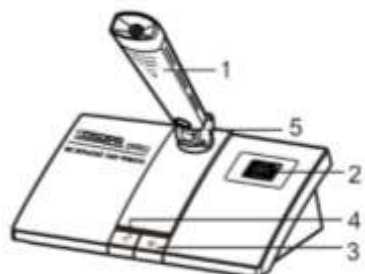

1. microphone head
2. LCD screen
3. standby/speak key
4. chairman unit priority key
5. non-removable microphone

### **Delegate unit**

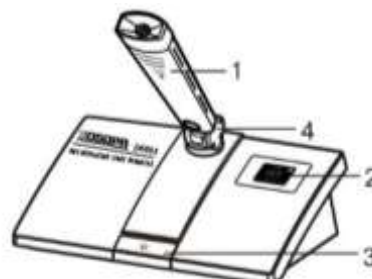

1. microphone head
2. LCD screen
3. Standby /spcak key
4. non-removable microphone