



24 Evoness SRL

Str. Bega Nr. 6
400601 Cluj-Napoca
Romania
Tel.: +40 744 539702
E-mail: videocapture@tehnicavizuala.ro
Website: www.tehnicavizuala.ro

HDMI Capture USB 2.0



Functions & Features

The **HDMI Capture USB 2.0** is a versatile capture device that is able to accept any input signal up to 4K p30, with a maximum capture resolution of 1920x1080p30. It supports USB Video Class Driver (UVC) and USB Audio Class Driver (UAC), which is why there is no need to install drivers anymore comparing with other capture cards/devices. Moreover, it is compatible with a wide range of video capture/recording/streaming applications such as vMix and OBS, smoothly connecting with mainstream video conferencing applications: Skype, Microsoft Teams, Google Meet and video streaming platforms such as Facebook, YouTube, UStream, etc. It is compatible with all Operating Systems: Windows, Mac, Linux.

Applications

- Video Capture & Editing
 - Video Conferencing
- Live Production & Streaming
 - Medicine
 - Military
 - Gaming



4K 30FPS



HDMI IN



USB2.0



Linux



MAC




WINDOWS



24 Evoness SRL

Str. Bega Nr. 6
400601 Cluj-Napoca
Romania
Tel.: +40 744 539702
E-mail: videocapture@tehnicavizuala.ro
Website: www.tehnicavizuala.ro

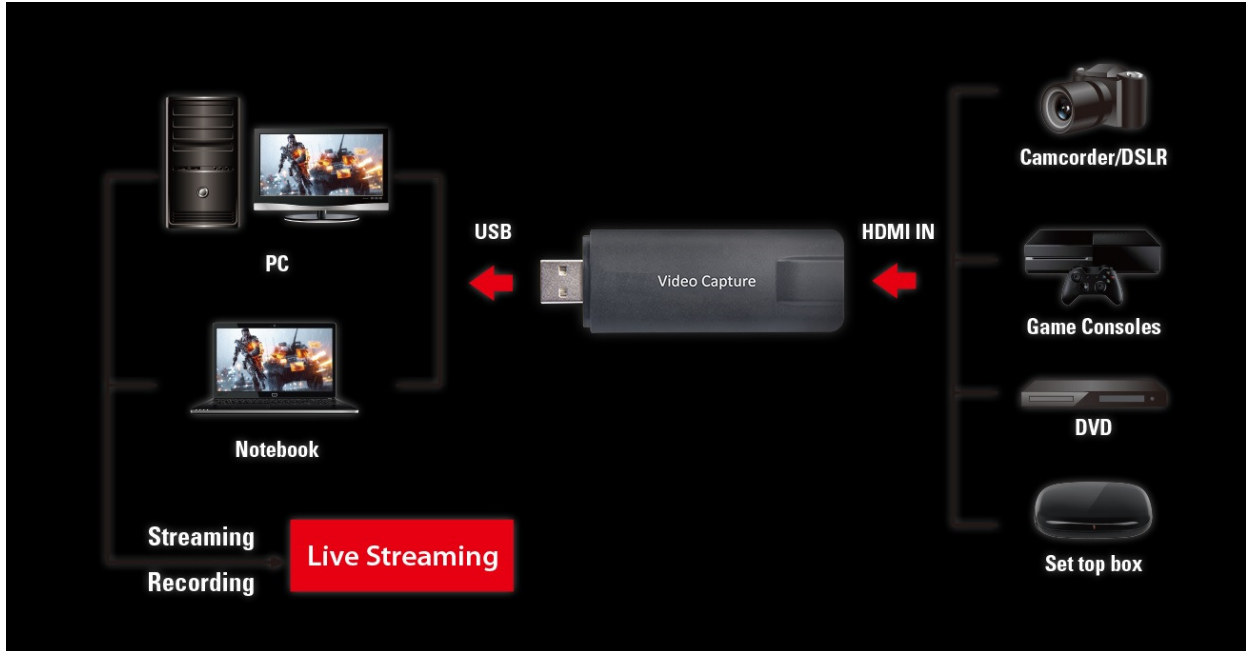

Specifications

- Video input: HDMI
- USB Port: USB 2.0
- Max. input Resolution: 4K (3840x2160@30HZ), HDMI 1.4b (unencrypted)
- Max. output Resolution: Full HD (1920x1080@30Hz)
- Audio Sampling Format: 16bit, 20bit, 24bit L-PCM 32KHz, 44.1KHz, 48KHz
- Operating Temperature: 0 – 45 °C
- Storage Temperature: -20 – 60 °C
- Dimensions (L x W x H): 81x29x13mm
- Weight: 10g
- OS Support: Windows 7 / Windows 10 32bit and 64bit
Mac OS X 10.13 and above
Linux:Ubuntu 14.0 and above